

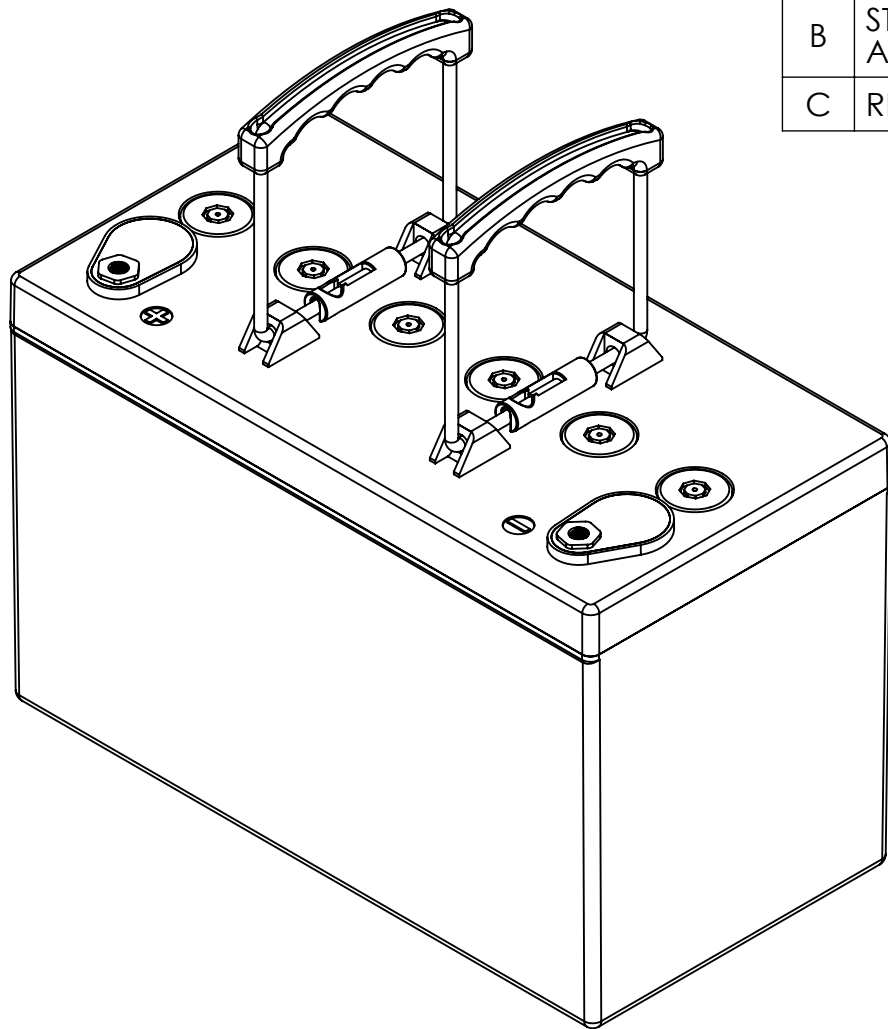
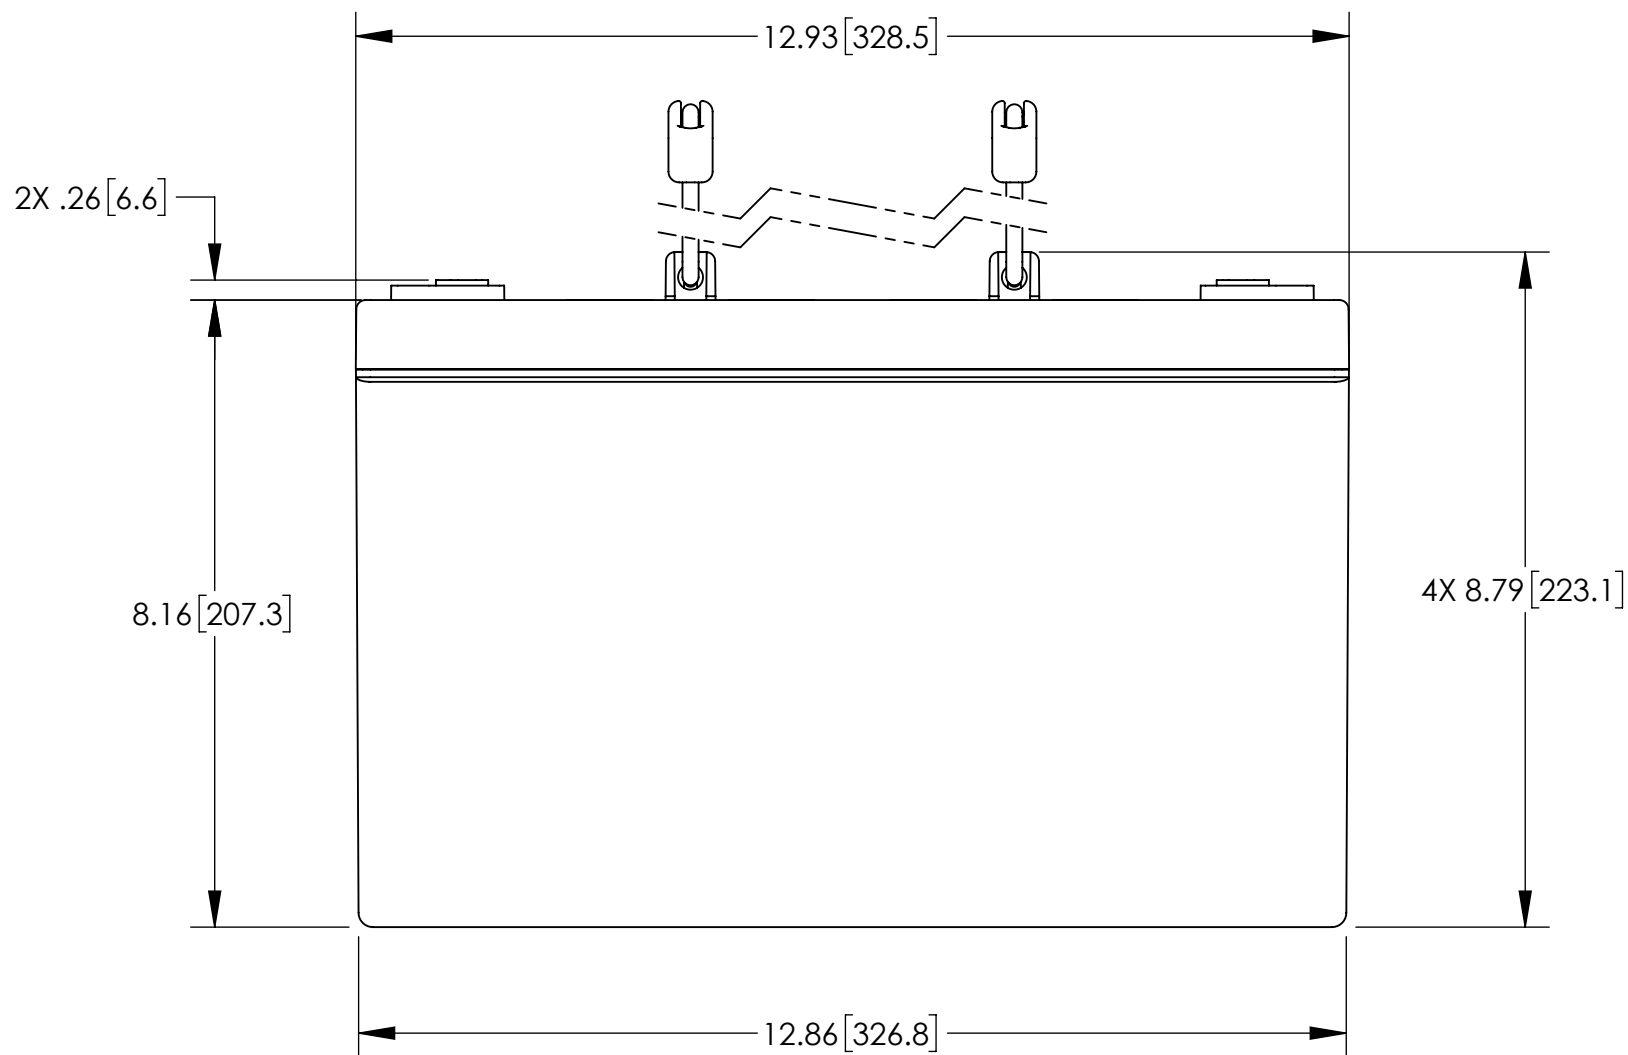


NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00290 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. DIMENSIONS ARE INCH [MILLIMETER].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).
5. TERMINAL HARDWARE KIT PROVIDED, PART NUMBER 6923.

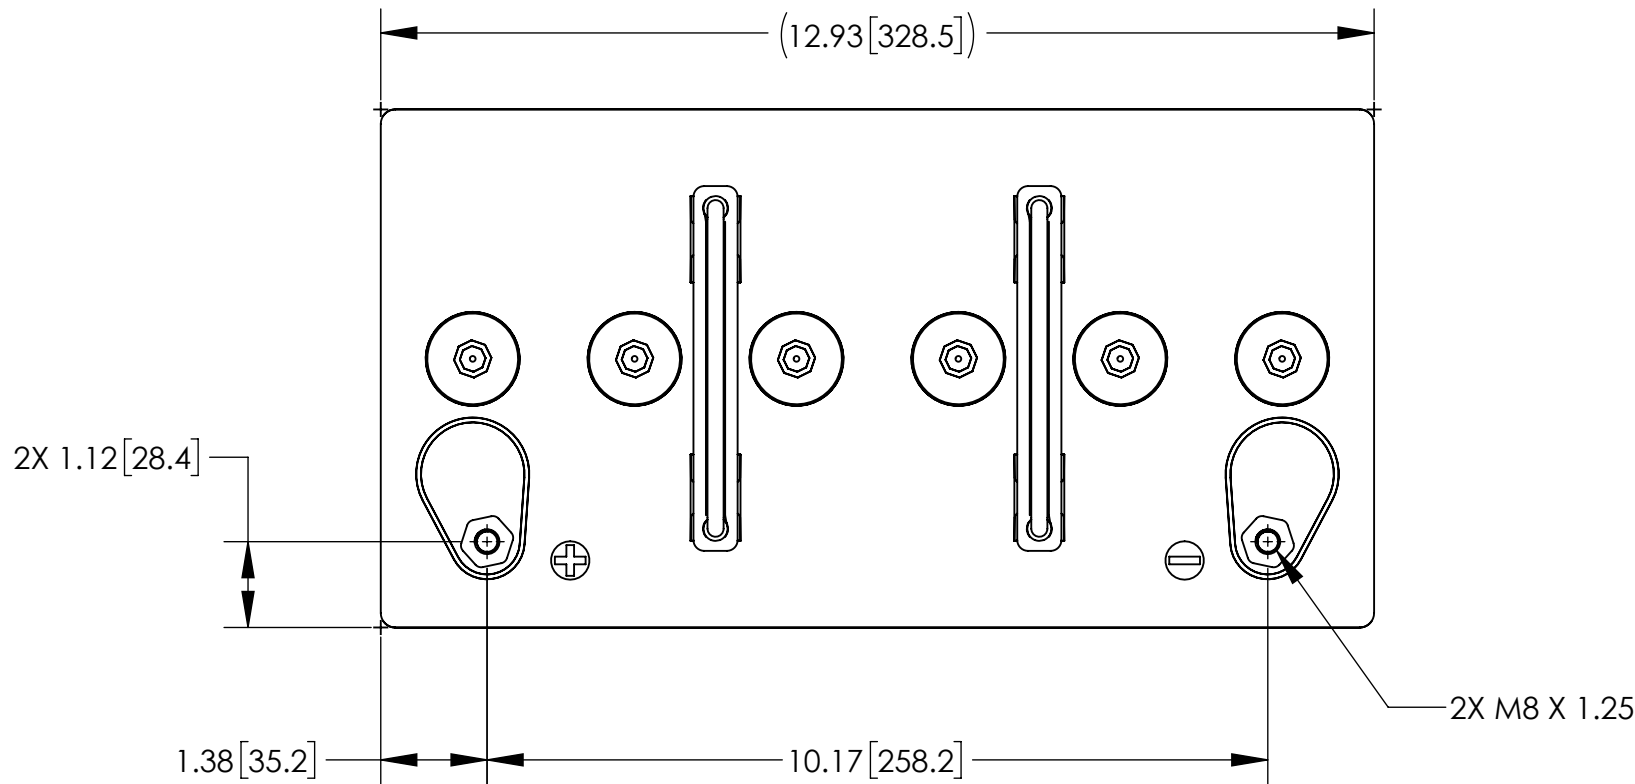

ISOMETRIC VIEW

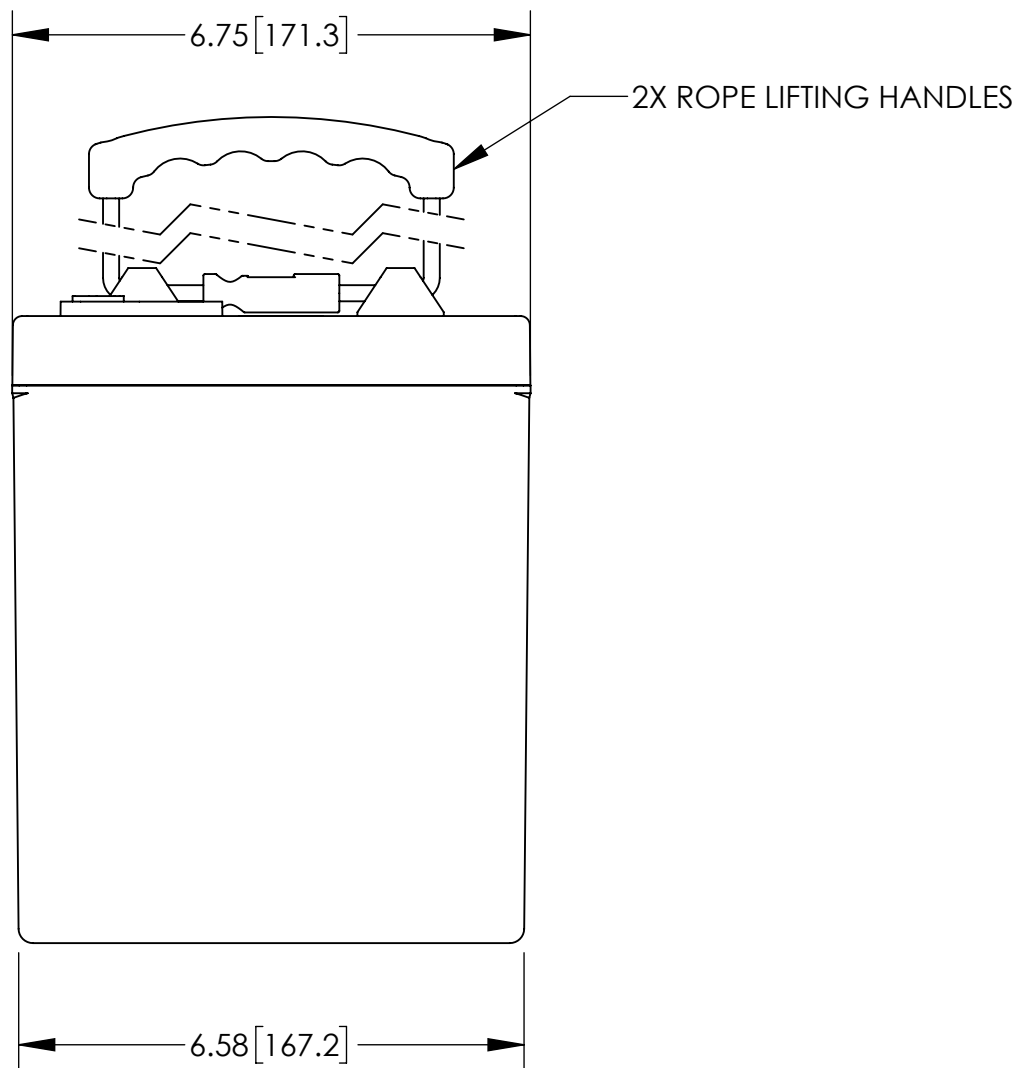

ENVELOPE DRAWING

CAPACITY RATINGS	
PART NUMBER	PVX-1180T
NOMINAL WEIGHT	72 LBS [32.7 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	118 AH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/32 .XX ± .12 ±1° .XXX ± .060			CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790						
			APPROVALS		DATE	TITLE BATTERY, SLA, 12 VOLT, PVX-1180T					
			DRAWN D. AYALA		5/13/11						
TREATMENT NONE			CHECKED AMIII		5/16/11	SIZE C	CAGE CODE 63017		DWG NO. PVX-1180T		REV C
FINISH NONE			APPROVED DV		5/17/11						
SIMILAR TO		CALC. WT	ISSUED DH		2/21/22	SCALE 1:2.5		SHEET 1 OF 1			